



GREENCREATIVE


Bringing You the Latest in LED Technology



PANEL ELEVATE SERIES

PANEL PRODUCT FEATURES

Edge Lighting Technology

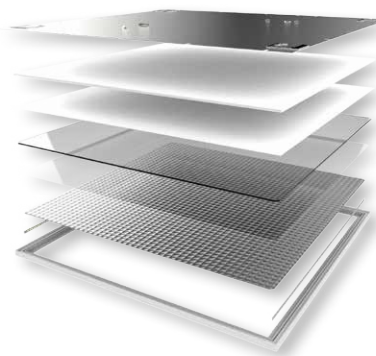

- BACK PLATE
- FOAM ALIGNING PLATE
- REFLECTOR
- LIGHT GUIDE PLATE
- DIFFUSER
- SootheOptic LOW GLARE
- EDGE LIGHTING
- TRIM

The PANEL ELEVATE Series uses the latest in edge lighting technology to produce a smooth uniform lighting effect. These sleek, low glare panels create a comfortable environment and install easily in all ceiling applications.


SootheOptic Low Glare Technology



Glare Control Diffuser



Viewing Angle

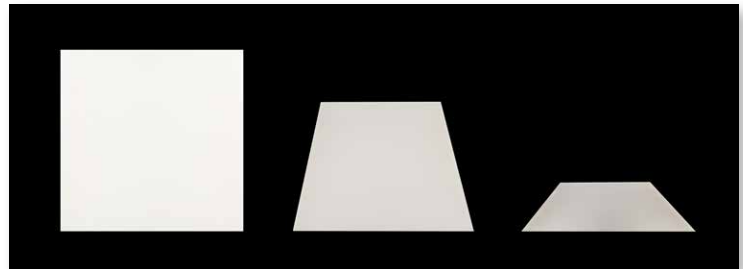

0°

45°


>65°

These PANELS all feature SootheOptic technology that reduces high-angle light and minimizes visual glare. The smooth low glare diffuser gives each luminaire a soft cutoff without visible color separation.

Versatile Installation



Ceiling T-grid

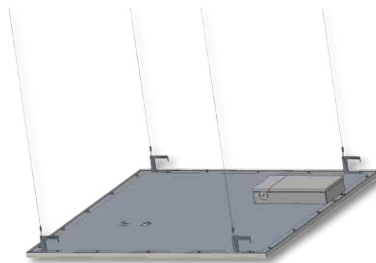

Suspended Mount




Surface Mount

The PANELS install easily and quickly and come standard for T-grid installation. Accessories are also available for suspended and surface mounting. All wiring takes place inside the integrated driver box.

PANEL PRODUCT FEATURES

Unified Glare Rating (UGR) <19

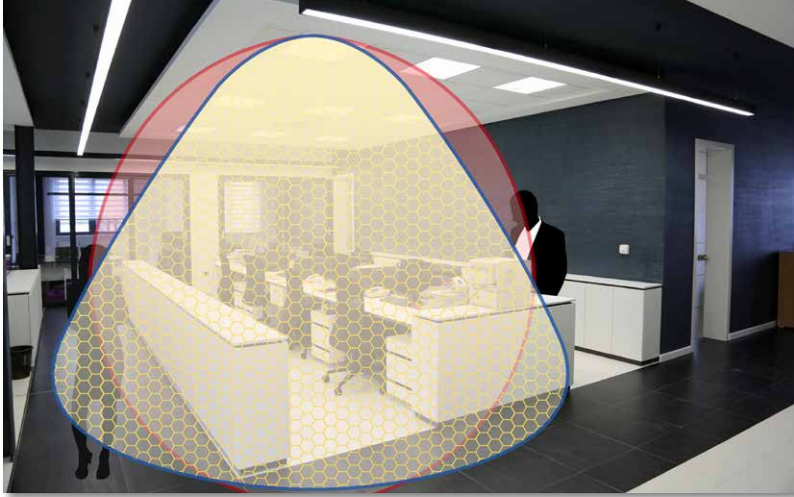

GREEN CREATIVE Panel
UGR <19

- Comfortable light at all viewing angles
- More useful light
- No perceptible discomfort

Standard LED Panel
UGR >23

- Harsh glare at viewing angles >65°
- More wasted light
- Perceptible discomfort



Healthcare



Education



Retail

Options & Accessories



EMERGENCY BACKUP

- 10W emergency backup for 90 minutes of illumination
- Option available for all PANELS (factory installation)



SURFACE MOUNT FRAME

- For surface mounting
- Accessory sold separately for all PANELS

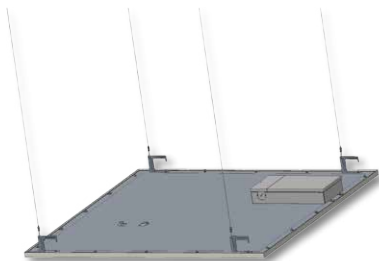
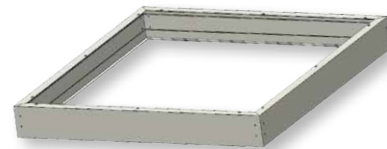


SUSPENSION CABLES

- For suspended mounting
- Accessory sold separately for all PANELS



PANEL SERIES

PANEL 2X2' 30W



- 3450lm
- 115 LPW
- Low glare UGR <19
- 120-277V universal voltage
- 0-10V dimming
- 3000K, 3500K & 4000K CCT
- 75,000-hr lifetime 10-yr warranty

PANEL 2X4' 38W

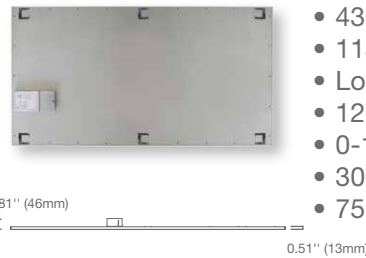

- 4300lm
- 113 LPW
- Low glare UGR <19
- 120-277V universal voltage
- 0-10V dimming
- 3000K, 3500K & 4000K CCT
- 75,000-hr lifetime 10-yr warranty



Specifications

	Model	Product	CCT	Power (W)	Lumens (lm)	LPW	Beam Angle	CRI (typ.)	Dim	Life (hrs)	Voltage	DLC
PANEL 2X2' 30W	30PAN22DIM/830/277V	28345	3000K	30	3350	112	95°	82	Yes	75,000	120-277V	Standard
	30PAN22DIM/835/277V	28346	3500K	30	3350	112	95°	82	Yes	75,000	120-277V	Standard
	30PAN22DIM/840/277V	28347	4000K	30	3450	115	95°	82	Yes	75,000	120-277V	Standard
PANEL 2X4' 38W	38PAN24DIM/830/277V	28349	3000K	38	4150	109	95°	82	Yes	75,000	120-277V	Standard
	38PAN24DIM/835/277V	28350	3500K	38	4150	109	95°	82	Yes	75,000	120-277V	Standard
	38PAN24DIM/840/277V	28351	4000K	38	4300	113	95°	82	Yes	75,000	120-277V	Standard

Note: To order the EMERGENCY BACKUP add /EM to the model number

Ex. 38PAN24DIM/840/277V/EM

* Suitable for damp locations only

Accessory Ordering Information

Model	Product	Description
MOUNTFRAME22	28390	2X2' Surface Mount Frame
MOUNTFRAME24	28391	2X4' Surface Mount Frame
SUSPCABLE22	28392	70.9" (1.8m) Aircraft Suspension Cable (Set of 4 Cables for 1 2X2' Fixture)
SUSPCABLE24	28393	70.9" (1.8m) Aircraft Suspension Cable (Set of 6 Cables for 1 2X4' Fixture)



GREEN CREATIVE
1200 Bayhill Drive, Suite 220
San Bruno, CA 94066

Tel / Fax: (866) 774-5433
info@greencreative.com
www.greencreative.com

f / GREENCREATIVELED
t / GCLightingLED
in / GREEN CREATIVE